


PRODUCT CATALOG

MODULAR METAL FABRICATORS INC.

Nylon Duct Clamp & Tool

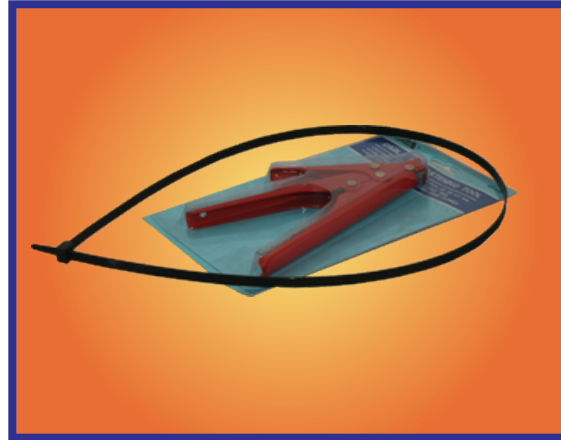

DESCRIPTION:

For clamping Flexible Air Ducts and securing other HVAC components.

- High Strength**
 Rated at 175-lb. minimum loop tensile strength. Designed to meet or exceed government designation Standards, where applicable. Actual test values exceed rated strength.
- Large Diameters**
 MDCV10-50 Clamp accommodates diameters up to 10".
 MDVC14-50 Clamp accommodates diameters up to 14".
 Clamps may be joined together for larger diameters.
- Clamping Flexible Duct (HVAC)**
 The larger sizes are for clamping connections, of flexible high or low-pressure HVAC duct, in heating and air conditioning applications. Secure, tightly clamped joints can be achieved easier and faster than with metal bands. Nylon clamps also cost less than metal bands and they eliminate the hazards of sharp metal edges. Nylon clamps may also be used to secure insulation to duct and to bundle cables.
- Material Specifications**
 All heavy-duty duct clamps are molded from Industrial Grade Type 6/6 black nylon. This nylon meets UL 94V-2 Flammability Classification. It's normal usage temperature range is -40° Fahrenheit (-40° Centigrade) to 185° Fahrenheit (85° Centigrade).

Duct Clamps are approved for clamping most types of flexible air ducts. These products meet or exceed U.L. 181 Class 1 standards. For indoor use only.

| PART NUMBER | DUCT ID | TENSILE STRENGTH | OVERALL LENGTH | WIDTH | Order QTY |
|-------------|-------------------------|------------------|----------------|--------|-----------|
| | | | | | |
| MDCV10-50 | 10" | 175 lbs. | 36" | 0.345" | |
| MDCV14-50 | 14" | 175 lbs. | 48" | 0.345" | |
| MDCVSTHV | Clamp Installation Tool | | | | |

Bag quantity 50 each. Case quantity 500 each.