




MODULAR METAL FABRICATORS INC.

PRODUCT SPECIFICATIONS

Poly Jacket Series **R-6** Modular Flex Poly Core Flexible Duct

POLY JACKET FDMA SERIES

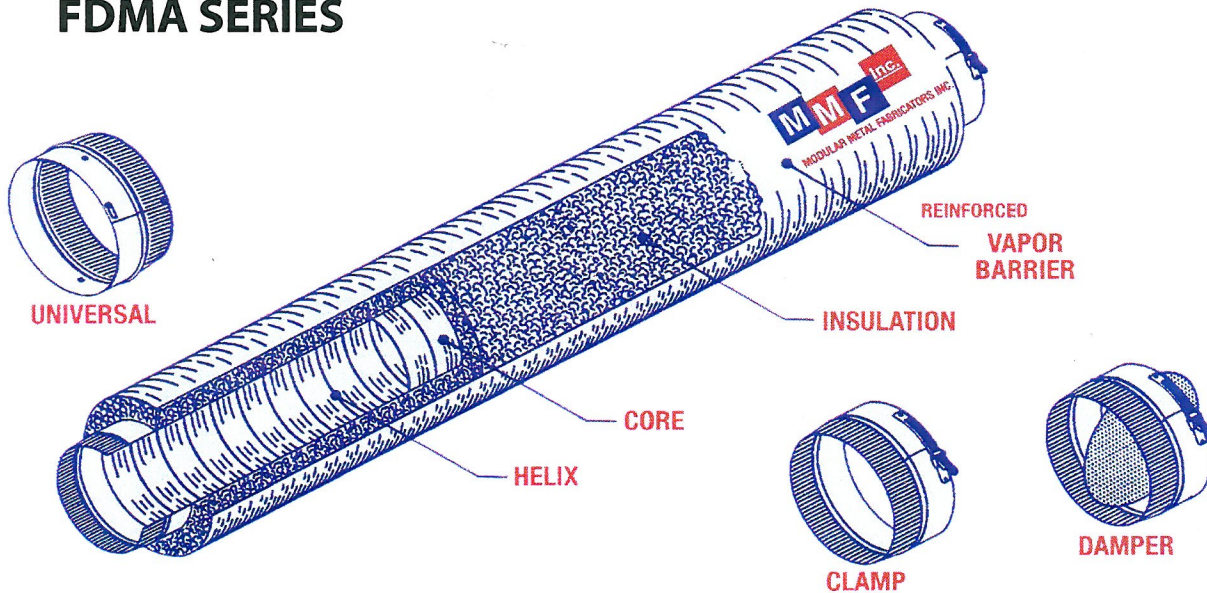

DESCRIPTION

- Standard Length: 25 feet
- Optional Length: 6' long
- Collars: Universal, Clamp, Damper
- Vapor Barrier: A durable scuff polyethylene jacket perm = 0.05
- Insulation: **R-6:** A 1 3/4" thick blanket of fiberglass insulation using ASTM -518 (1991) at installed wall thickness on flat insulation only
- Scrim: A fiberglass threaded mesh
- Core: A full internal poly liner which completely shields the air flow from fiberglass erosion.
- Helix: Encapsulated, hard drawn spring wire
- Working Pressure: (with collars)
Positive 2" W.G.
Negative 1/2" W.G.
(without collars)
Positive 10" W.G.
Negative 1/2" W.G.
- Temperature Range: -20F to + 200F
- Velocity: 4000 FPM
- Codes: UL-181 Class 1 AIR DUCT
NFPA 90A & 90B



Owens Corning Fiberglass
With Green Guard Certification

