


MODULAR METAL FABRICATORS INC.

# PRODUCT SPECIFICATIONS

## R-6 Modular Flex Acoustical Flexible Duct

### POLY JACKET FDMAA SERIES

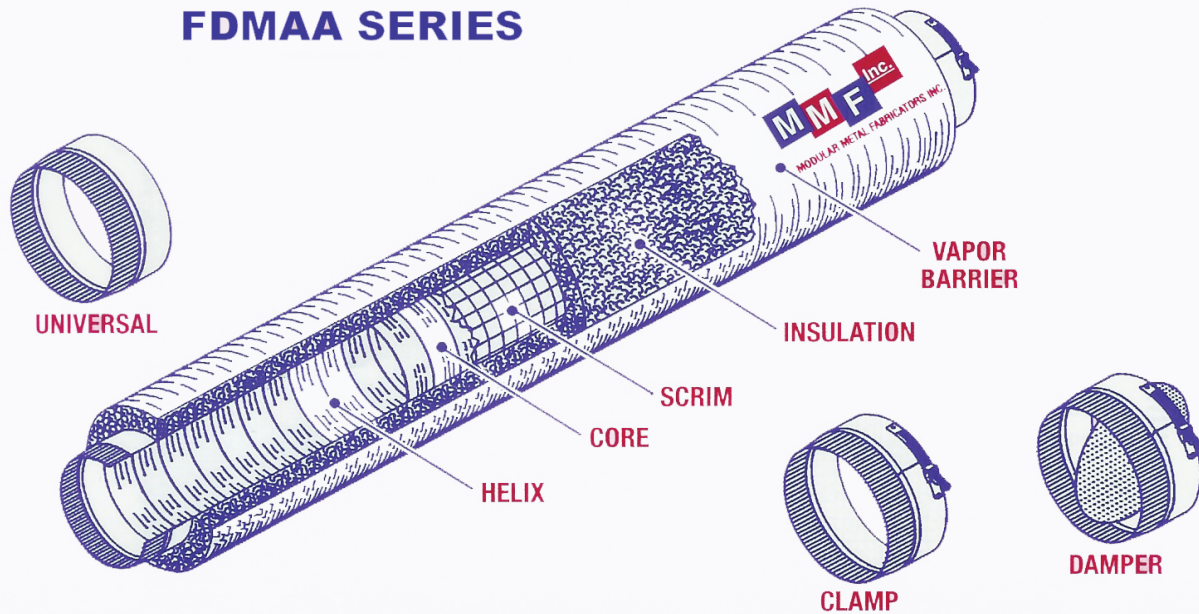

### DESCRIPTION

- Standard Length: 25 feet
- Optional Length: 6 feet
- Collars: Universal, Clamp, Damper
- Vapor Barrier: A durable scuff polyethylene jacket perm+ 0.17
- Insulation: **R-6:** A thick blanket of fiberglass insulation using ASTM -518 (1991)
- Scrim: A fiberglass threaded mesh
- Core: Spunbound nylon acoustical liner which completely shields the air flow from fiberglass erosion.
- Helix: Encapsulated, hard drawn spring wire
- Working Pressure: (with collars)  
Positive 2" W.G.  
Negative 1/2" W.G.  
(without collars)  
Positive 2" W.G.  
Negative 1/2" W.G.
- Temperature Range: -20F to + 200F
- Velocity: 4000 FPM
- Codes: UL-181 Class 1 AIR DUCT  
NFPA 90A & 90B



Owens Corning Fiberglass  
With Green Guard Certification

